


"Not all drainage blockages are caused by Fats, Oils and Grease!"

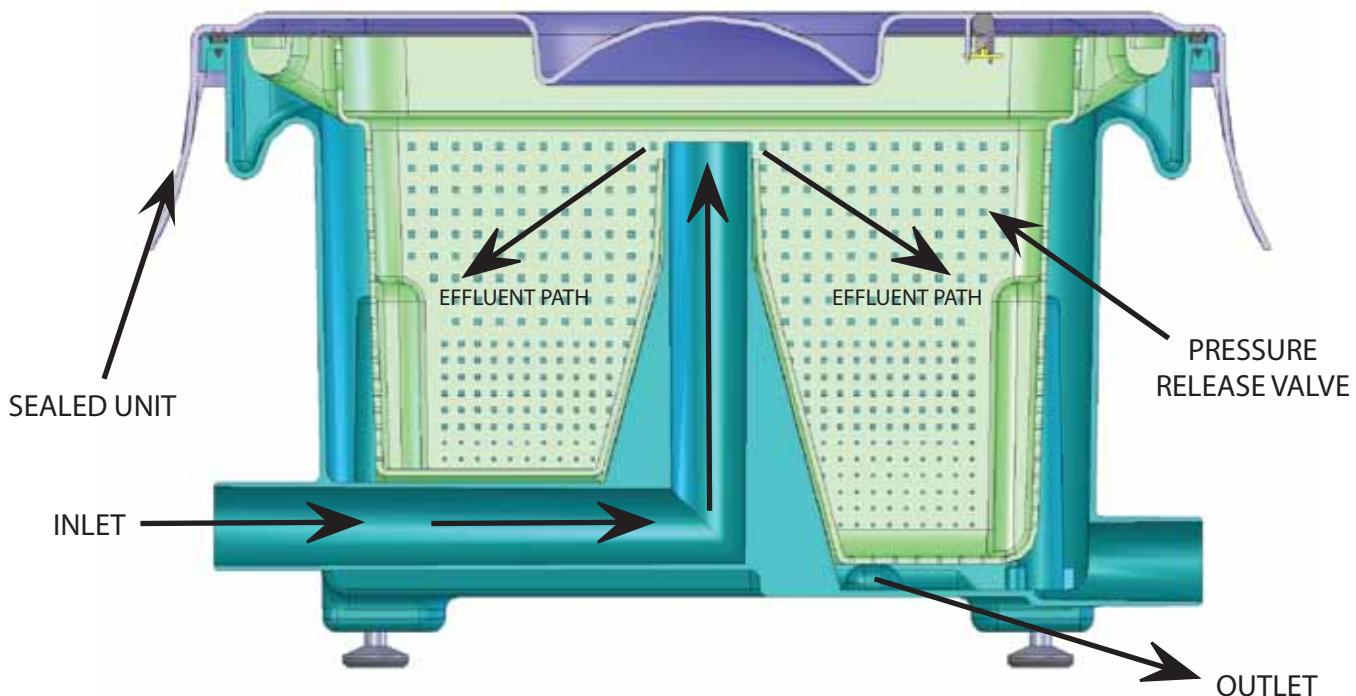

EFFICIENT CONTINUOUS REMOVAL OF SOLIDS WASTE

**NO MOVING PARTS!
NO ENERGY COSTS!
NO PROBLEMS!!**

**No Membrane Filter
to Replace!**

ISO Certifications



Quality
ISO 9001:2008

Environment
ISO 14001:2004

Health & Safety
OHSAS 18001:2007

Members of



5 Shepherd's Drive
Carnbane Industrial Estate
Newry, Co. Down
N. Ireland, BT35 6JQ
Tel: +44 (0) 28 3083 3081
Fax: +44 (0) 28 3025 7556

Award Winning Technology

www.FilterShield.eu

FilterShield™

Meat/Fish/Sandwich Preparation sinks



Potato peelers or rumbler



FilterShield creates a pressure drop similar to the effect of a fountain, enabling separation and retention of solids and allowing water to drain away!



Sinks used for rice washing



Sinks used for the disposal of coffee grinds



Pot sinks

Save Money On Call-out Charges and Drain Cleaning!



Key Applications

- ✓ Coffee Shops
- ✓ Cafes
- ✓ Delis
- ✓ Commercial Kitchens
- ✓ Pot and Pre Rinse Sinks



Why commercial kitchens need a FilterShield!



Coffee Grinds




Potato Peelings



Vegetable Peelings



A combination of grease
and dairy waste

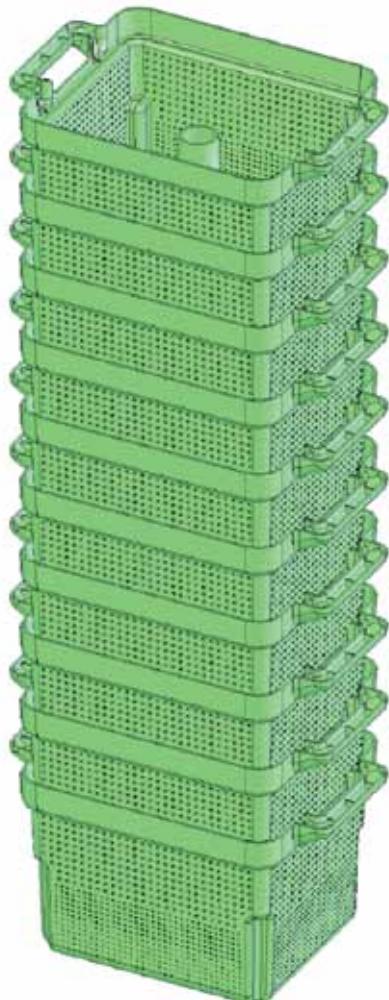


A NEAT AND TIDY SOLUTION!

Each filter basket can hold 15kg of solids waste and they are stackable to provide a solution for even the most demanding kitchen environment.





FilterShield Dimensions

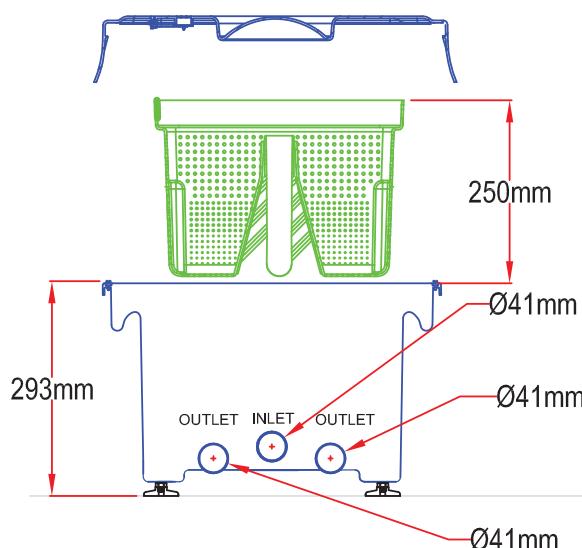


Applications

Meat/Fish/Sandwich Preparation sinks
 Potato peelers or rumbler
 Sinks used for the disposal of coffee grinds
 Pot sink and Pre Rinse Sink

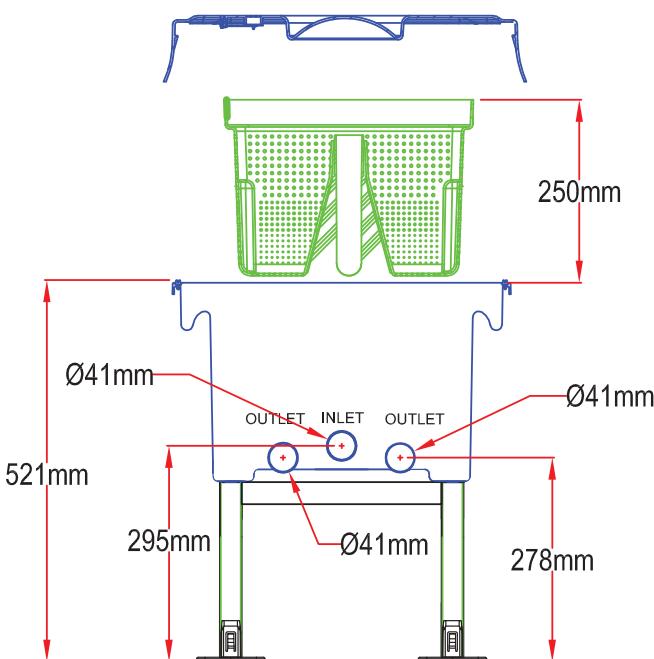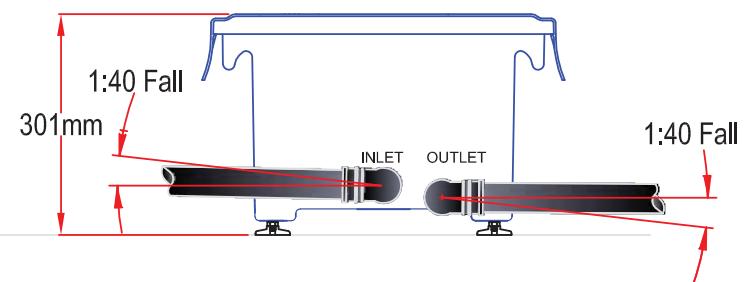

Height required for
 remove Filter Tray

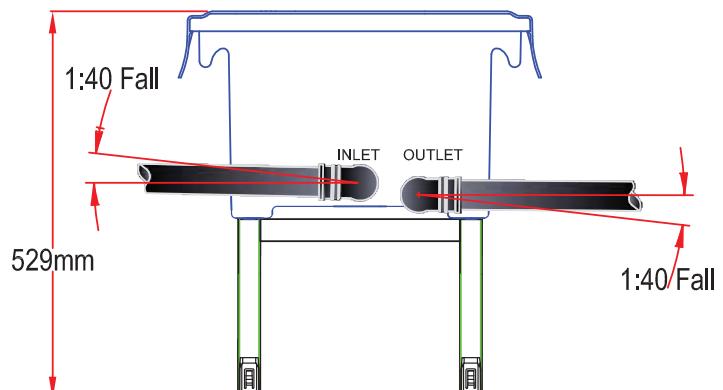

Inlet pipe size: 41mm (outside diameter) Imperial 1½"; the recommended fall is 1:40.

Outlet pipe size: 41mm (outside diameter) Imperial 1½"; the recommended fall is 1:40.

Removal of Filter Tray: 250mm clearance is required from the top of the FilterShield and any obstructions, for example: top of the FilterShield and the underneath of a sink drainer.

Flow to the FilterShield: the FilterShield must be at least 40mm lower than the bottom of the sink bowl.

For more details please visit FilterShield.eu